





Mounting Bolt Pattern

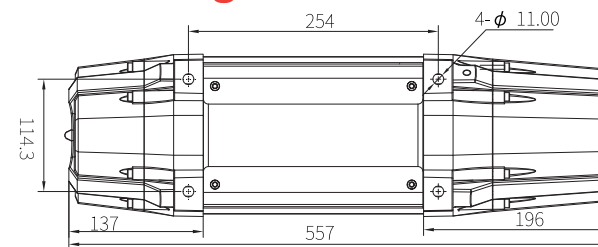

Dimensions

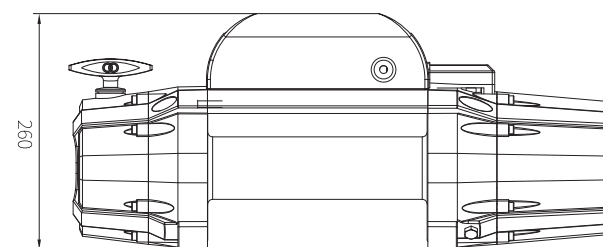

FEATURES & SPECIFICATIONS

Rated Line Pull:12000LB(5443kg) single-line

Motor: 6.6hp/4.9kw 12V, series wound motor

Gear Train: 3-stage planetary

Gear Reduction Ratio: 216:1

Clutch: turn 180°

Cable: $\phi 9.5\text{mm} \times 27\text{m}$

Drum Size: $\phi 64\text{mm} \times 224\text{mm}$

Overall Dimensions: (L×W×H) 21.9"×6.5"×10.2"
(557mm×165mm×260mm)

Package:1pc/box 630×245×405mm

Gross Weight(rope winch):76.0 lbs(34.5kg)

Duty Cycle:Intermittently

Fairlead: aluminium fairlead

Remote Control: Included

Mounting Bolt Pattern: 10"×4.5"(254×114.3mm)

LINE Speed & Amp Draw-First Layer

Line Pull	Lbs	NO	4000	6000	8000	10000	12000
	Kgs	LOAD	1814	2721	3630	4536	5443
Line speed	Ft/min	31.8	21.6	17.7	13.4	11.2	7.9
	M/min	9.7	6.6	5.4	4.1	3.4	2.4
Motor Current	amps	75	195	240	291	335	350

LINE PULL AND Cable Capacity

Layer of cable		1	2	3	4
Rated line	Lbs	12000	10270	9200	8450
Pull per layer	Kgs	5443	4658	4173	3833
Cumulative	Ft	16	39	69	89
Cable capacity	m	5	12	21	27