


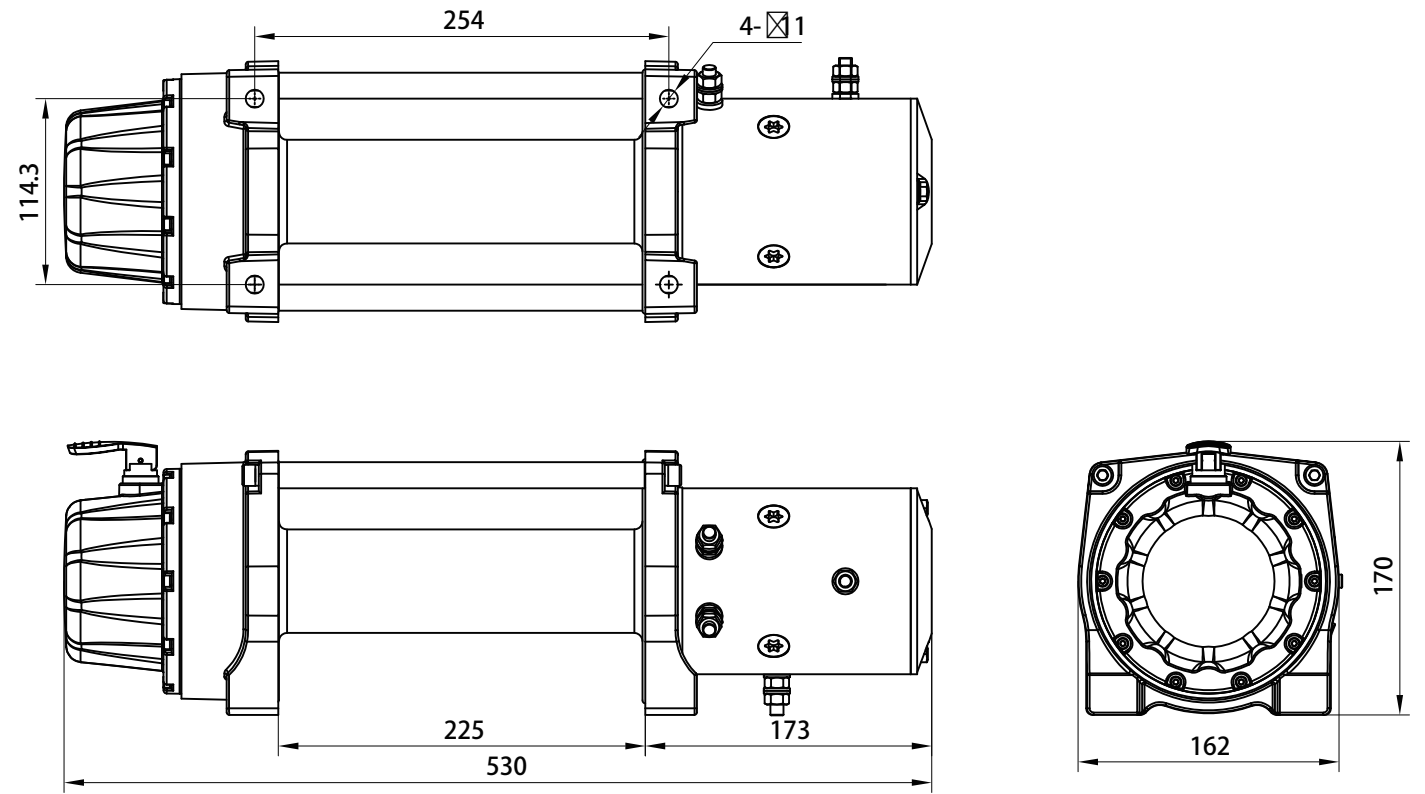

FEATURES & SPECIFICATIONS

Rated Line Pull:9500LB(4309kg) single-line
Motor:5.2hp/3.9kw 12V, Series Wound motor
Gear Train: 3-stage planetary
Gear Reduction Ratio:216:1
Clutch:Up and down 90°
Cable:φ9.5mm×27m
Drum Size:φ64mm×224mm
Overall Dimensions:(L×W×H)21.1"×6.4"×6.7"
(535×162×170mm)

Gross Weight(rope winch):59.0 lbs(26.8kg)
Duty Cycle:Intermittently
Fairlead: aluminium fairlead
Package:1pc/box, 600x245x370mm
Mounting Bolt Pattern:10"×4.5"(254×114.3mm)
Remote Control:Included

LINE Speed & Amp Draw-First Layer

Line Pull	Lbs	NO	2000	4000	6000	8000	9500
	Kgs	LOAD	907	1814	2721	3630	4309
Line speed	Ft/min	30.2	20.7	18.0	13.8	10.2	7.9
	M/min	9.2	6.3	5.5	4.2	3.1	2.4
Motor Current	amps	75	95	195	240	291	325

LINE PULL AND Cable Capacity

Layer of cable		1	2	3	4
Rated line	Lbs	9500	8432	7640	7086
Pull per layer	Kgs	4309	3825	3465	3214
Cumulative	Ft	16	39	69	89
Cable capacity	m	5	12	21	27